

G250F Photoluminescent Pathmarking Tape


The **G250F** Photoluminescent Pathmarking Tape is a highly visible strip that fits a variety of photoluminescent pathway marking applications. It will increase visibility and enhance egress speed in all light conditions. The non-radioactive, non-toxic photoluminescent strip is visible for many hours after the lights go out, having been charged from sunlight or artificial light.

General Information:

- Photoluminescent PET Tape
- 1" x 60 feet per roll
- Weight: 0.78 lbs/Roll.

How to Install:

- Installation surface should be smooth, cleaned of any contaminants and completely dried before tape is applied.
- Fresh paint must be allowed to cure before tape is installed. Loose paint must be removed from painted surfaces.
- Surface preparation is required. Do not stretch tape when applying on installation surface.
- At room temperature, the adhesive takes at least 24 hours to gain maximum bond strength

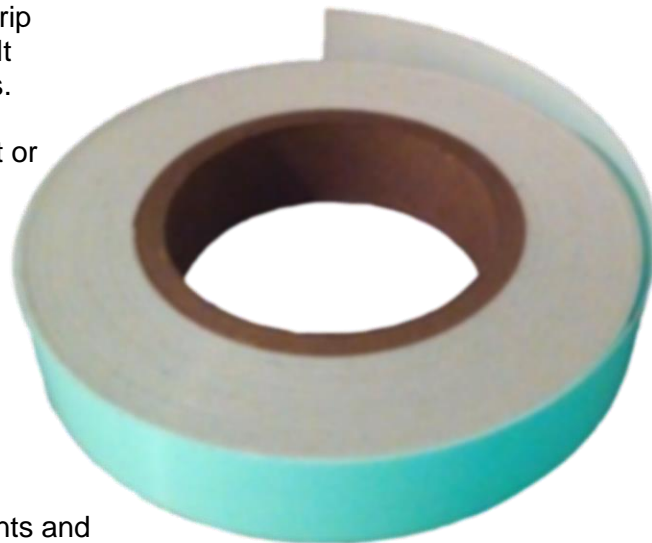

The Ecoglo G250F meets the following Building, Fire & Life Safety Codes:

- IBC/IFC 2009, 2012 (Section 1024 – Luminous Egress Path Markings) and 2015 (Section 1025)
- NFPA 101-2009 and 170-2009
- NYC LL 141 of 2013 (Section BC 1024 Luminous Egress Path Markings)
- NYC LL 26 of 2004 Reference Standard 6-1
- California Building Code Section 1024 Exit Passageways
- Connecticut State Fire Safety Code Section 1026 Floor Proximity Egress Path Markings



SA33553
4HT0

**UL 1994 AND
ULC 572 Listed**

Benefits and Technical Details: Ecoglo G250F meets or exceeds the performance criteria specified in the following tests or standards:

Brightness

High visibility in dark or light conditions.

- ASTM E2073-02, Standard Test Method for Photopic Luminance of Photoluminescent (Phosphorescent) Markings.
- ISO 17398:2004 Clause 7.11, Safety Colours and Safety Signs- Classification, Performance and Durability of Safety Signs.
- UL 1994 Listed – IMZI.SA3353
- UKLC 572 Listed – IMZI7.SA3353

Washability

Easy Cleaning.

- ASTM D4828-94(2003), Standard Test Methods for Practical Washability of Organic Coatings.

Radioactivity

No radioactivity or toxicity.

- Toxicity: Bombardier SMP 800-C (2000), Toxic Gas Generation Test.

Flammability

Does not burn.

- ASTM E162-02, Standard Test Method for Surface Flammability of Materials Using a Radiant Heat Energy Source.

Contact Ecoglo Inc. for a quick quote or to obtain more information about our emergency lighting products.